

980nm/C or L Band Compact WDM



Product Features

- Very Compact Size
- Low PDL
- Low Insertion Loss
- High Isolation
- High Return Loss
- Stable and Reliable


Product Applications

- Optical Communication System
- Optical Fiber Amplifier
- EDFA Module

Specifications			980nm/C or L Band	
Parameter		Unit	Premium	A grade
Shorter Wavelength Channel		nm	960 to 990	
Insertion Loss	Max.	dB	0.3	0.4
PDL	Max.	dB	0.05	0.05
Isolation @ C or L band	Min.	dB	20	18
Longer Wavelength Channel		nm	C Band (1528 to 1565) or L Band (1570 to 1605)	
Insertion Loss	Max.	dB	0.3	0.4
PDL	Max.	dB	0.05	0.05
Isolation @ 960 to 990 nm	Min.	dB	20	18
Return Loss*	Min.	dB	50	45
Operating power	Max.	W	5	
Operating Temperature		°C	-40 to +85	
Storage Temperature		°C	-50 to +85	
Package Type		mm	S4	Ø3x35: for bare fiber
			S6	Ø3x54: for 0.9mm loose tube

* Test at central wavelength only.

980nm/C Band WDM Typical Spectrum

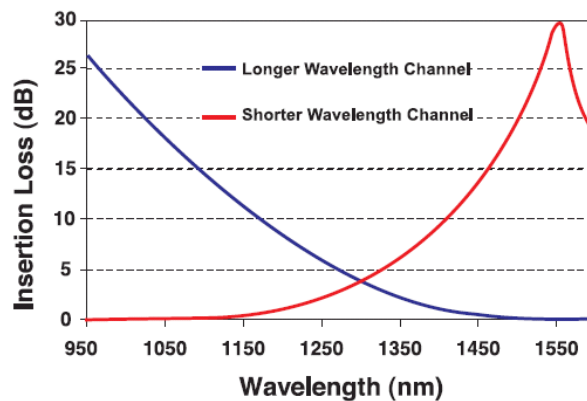

Ordering Information

S	W	D	M			O						
Wavelength	Structure	Grade	Package	Fiber Type	Pigtail	Fiber Length	Connector					
1=980nm/ C Band 2=980nm/ L Band	1=1x2 2=2x2	P=Premium A=A grade	3=S4 5=S6	5=OFS980-20 6=HI1060 7=HI1060 FLEX 8=OFS980-16	S=250um bare fiber M=0.9mm loose tube	0=0.5m 1=0.75m 2=1.0m S=Specify	0=None 1=FC/PC 2=FC/SPC 3=FC/APC 4=SC/SPC 5=SC/APC 6=ST 7=FC/UPC 8=SC/UPC 9=MU A=LC B=SC/PC					

Note: 1. Central Wavelength can be customized for different applications.
2. All specifications are before connectors and are subject to change without notice.